

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

PCT/GB04/04202

REC'D 18 OCT 2004

WIPO PCT

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

Ansökan ingavs ursprungligen på engelska.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

The application was originally filed in English.

(71) Sökande                      AstraZeneca AB, Södertälje SE  
Applicant (s)

(21) Patentansökningsnummer    0302665-5  
Patent application number

(86) Ingivningsdatum                      2003-10-07  
Date of filing

Stockholm, 2004-08-09

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Hjördis Segerlund*  
Hjördis Segerlund

Avgift  
Fee                      170:-

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

BEST AVAILABLE COPY

## NOVEL PROCESS

### Processing method and apparatus

5 The present invention relates to a processing method and apparatus, more particularly, to processing a body so as to remove any electrostatic charge and improve inhaler performance in drug delivery to the respiratory tract.

10 In the manufacture of many devices, there has been the problem that components of the device acquire electrostatic charges, which remain during assembly and/or sale. To overcome the problem, it has been proposed to use Corona dischargers, in particular by providing ions by using Corona ionisation. The irradiated ions are used to neutralise electrostatic charges on components of the devices.

15 The use of Corona discharges is itself problematic. In particular, the discharges are awkward to handle and need to be brought into close proximity with any device to be discharged. Even then, by virtue of the nature of a Corona discharger, the discharging ions are irradiated in a somewhat directional manner, such that it is difficult to ensure complete discharge of the innermost components of the device. It is also difficult to achieve uniform  
20 discharge of surfaces of the device. Indeed, surfaces near the Corona discharger may actually become charged by it.

25 The charge induced on the plastic inhaler device by the patient has not been extensively studied. It is speculated that a reduced bioavailability might result from a higher proportion of drug being retained in the inhaler from the more highly charged device and adhered to the carrier particles in the drug formulation.

30 It has been suggested that a pressure reduction induced discharge can be used as a surface charge elimination method (J. Electrostatic 49 (2000), 15-22), but nothing is said or implied of any influence of such treatment on improving the performance of a drug

delivery device for inhalation. The performance of such a drug delivery device is depending on the complex interactions between the device and the drug formulation per se.

Dry powders tend to become electrostatically charged. Triboelectrification in pharmaceutical powders is a very complicated and ill-defined process although it has been shown to be influenced by many factors, such as particle size and shape, physicochemical properties of the contacting surface, contact area and frequency, surface purity and atmospheric conditions (Powder Technology, 37 (1), 71-85 (1984)).

Electrostatic charging occurs during nearly every powder-handling process such as milling, micronisation, flow, fluidisation, tableting and capsule filling.

Electrostatic charge can also arise from collisions between particles and the container walls. Triboelectrification is also one of the major reasons why powders stick to the walls of any contacting containers. This creates a problem for a plastic inhaler where it is desired to get an accurate and uniform dose every time.

Moisture sorption of the particle surface is one of the most effective ways to remove surface charge. This is contradictory to what is desired in dry powder inhalers.

The handling of micronised powder for use in dry powder inhalers may be due to particle agglomeration, cohesion and adhesion to manufacture equipment, inhaler devices and container materials. WO 02/80884 relates to a method for the surface modification of powders in order to reduce electrostatic chargeability of the fine particles thereby improving powder flow properties during the manufacture of the dry powder inhalers and improving powder dispensing properties during application. By surface modification of the active substance the electrostatic charge acquisition by triboelectrification during the pharmaceutical processing and during handling/drug administration has been reduced.

We have now found that low pressure treatment of the part(s) of the dry powder inhaler, the empty dry powder inhaler, the inhaler filled with the powder formulation or the

formulation per se will reduce the charges from the plastic details or the powder and give high performance characteristics of the inhaler i.e. dose uniformity.

5 In a first aspect the invention therefore provides a process for the preparation of a dry powder inhaler which comprises exposing a dry powder inhaler optionally filed with a powder formulation, or one or more components thereof, to a gas at low pressure.

The gas is preferably air at a pressure of less than 200 mbar, preferably less than 100 mbar, more preferably less than 50 mbar and most preferably less than 1 mbar.

10

According to the present invention, there is also provided an apparatus for removing an electrostatic charge from a dry powder inhaler optionally filed with a powder formulation, or one or more components thereof, the apparatus comprising:

- 15 i) a chamber for containing one or more inhaler components, or a complete inhaler, optionally filed with a powder formulation,
- ii) a device for reducing the pressure of gas in the chamber
- iii) a controller/device for a) reducing the pressure of gas in the chamber and b) then returning the pressure to atmospheric pressure

20

The controller/device for step iii) suitable reduces the pressure to a value sufficiently low that ions of the gas, which accelerate under the influence of the electrostatic field of the a dry powder inhaler or components thereof, travel sufficiently far between collisions and gain sufficient energy, upon collision, ionise another molecule and trigger an avalanche

25

In a further aspect the invention provides a process for reducing electrostatic charges from a dry powder inhaler optionally filed with a powder formulation, or one or more components thereof, the process comprising:

- 30 i) placing a dry powder inhaler optionally filed with a powder formulation, or one or more components thereof in a chamber,
- ii) reducing the pressure of gas in the chamber,

iii) returning the pressure to atmospheric pressure

iv) optionally repeating steps ii) and iii)

An advantage of the invention is that the process can be accomplished at ambient  
5 temperature.

According to the present invention, there is provided a method of removing an electrostatic  
charge from a dry powder inhaler optionally filed with a powder formulation, or one or  
more components thereof, the method comprising the step of exposing one or more inhaler  
10 components, or a complete inhaler, optionally filed with a powder formulation one or more  
times to a gas, preferably air, at a pressure of no more than 200 mbar, preferably less than  
50 mbar and most preferably less than 1 mbar. In the case of powder present, the charges  
will be removed from the powder as well. Preferably the process of discharge is repeated a  
number of times. Optionally the powder could be treated alone.

15 The present invention will be more clearly understood from the following description,  
given by way of example only, with reference to the accompanying drawings.

Figure 1 illustrates schematically an apparatus embodying the present invention.

20 One or more assembled, or at least partly assembled inhalation devices are placed into a  
chamber 2 which, after being closed has its internal pressure reduced by a pump 4. A  
measuring device 6 is provided to control the pump 4 so as to reduce the air pressure in the  
chamber 2 to a desired pressure. The measuring device 6 is preferably configured  
25 automatically to control the system to repeat the process a plurality of times. It is generally  
only necessary to fully decompress the chamber 2 two or three times in order to effectively  
remove substantially all electrostatic charges from the device and/or powder.

As a result, the internal working parts of the inhalation device may be kept free of  
electrostatic charges for subsequent sale and use of the device.

A plurality of devices may be put in the chamber at once. In particular, a container (not shown), such as a bag, holding the device may be put in the chamber 2 and, after decompression, closed for the transportation of the devices.

5 Figure 2 illustrates component parts of an inhalation device which is for storing and dispensing predetermined doses of dry powder for inhalation. These parts are typically produced from one or more polymer materials and will almost certainly acquire electrostatic charges during the steps of injection moulding, handling and assembly. Thus, when assembled, the inhalation device will typically have a number of internal electrostatic  
10 charges, often of conflicting polarity in adjacent parts. Indeed, dry powder is almost always inevitably charged.

As will be appreciated, dry powder of a size suitable for inhalation is particularly sensitive to electrostatic forces. Therefore, for an inhalation device such as illustrated in Figure 2,  
15 but not limited hereto, it is particularly desirable to reduce any electrostatic charges in the component parts of the device.

The effect of electrostatic discharge at low pressures for the performance of an inhalation device has not previously been recognised. The method of using low pressure has many  
20 technical and economical advantages compared to other possible methods of reducing charges e.g. ethanol treatment of plastic details (needs drying processes etc).

Medicaments suitable for administration by using the present invention are any which may be delivered by inhalation. Suitable inhalable medicaments include for example  $\beta$ 2-  
25 adrenoceptor agonists for example salbutamol, terbutaline, rimeterol, fenoterol, reproterol, bitolterol, salmeterol, formoterol, clenbuterol, procaterol, broxaterol, picumeterol, TA-2005 (chemically identified as 2(1H)-Quinolone, 8-hydroxy-5-[1-hydroxy-2-[[2-(4-methoxyphenyl)-1-methylethyl]amino]ethyl]-monohydrochloride, [R-R\*,R\*] also identified by Chemical Abstract Service Registry Number 137888-11-0 and disclosed in  
30 U.S. Patent No 4.-579.854), mabuterol, formanilide derivatives like 3-(4-[[6-((2R)-2-[3-

formylamino)-4-hydroxyphenyl]-2-

hydroxyethyl} amino)hexyl]oxy}butyl)benzensulfonamide as disclosed in WO

2002/76933, benzensulfonamide derivatives like 3-(4-{[6-((2R)-2-hydroxy-2-[4-hydroxy-3-(hydroxymethyl)phenyl]ethyl)amino)-hexyl]oxy}butyl)benzenesulfonamide as disclosed

5 in WO 2002/88167 and the like; glucocorticosteroids such as budesonide, fluticasone (e.g. as propionate ester), mometasone (e.g. as furoate ester), beclomethasone (as 17-priopionate or 17,21dipropionate esters), ciclesonide, triamcinolone (e.g. as acetondie), flunisolide, zoticasone, flumoxonide, rofleponide, butixocort (e.g. as propionate ester), prednisolone, prednisone, tipredane, steroid esters according to WO 2002/12265, WO 2002/12266 and

10 WO 2002/88167 (e.d. 6 $\alpha$ ,9 $\alpha$ -difluoro-17 $\alpha$ -[2-furanylcarbonyl]oxy]-11 $\beta$ -hydroxy-16 $\alpha$ -methyl-3-oxo-androsta-1,4-diene-17 $\beta$ -carbothioic acid S-fluoromethyl ester, 6 $\alpha$ ,9 $\alpha$ -difluoro-11 $\beta$ -hydroxy-16 $\alpha$ -methyl-3-oxo-17 $\alpha$ -propionyloxy-androsta-1,4-diene-17 $\beta$ -carbothioic acid S-(2-oxo-tetrahydrofuran-3S-yl) ester and 6 $\alpha$ ,9 $\alpha$ -difluoro-11 $\beta$ -hydroxy-16 $\alpha$ -methyl-17 $\alpha$ -[(4-methyl-1,3-thiazole-5-carbonyl)oxy]-3-oxo-androsta-1,4-diene-17 $\beta$ -

15 carbothioic acid S-fluoromethyl ester; anticholinergic bronchodilators such as tolterodine, ipratropium bromide, tiotropium bromide and oxitropium bromide; PDE-IV inhibitors; antihistamines; expectorants; mucolytics; cyclooxygenase inhibitors; leukotriene synthesis inhibitors; leukotriene antagonists; phospholipase-A2 inhibitors; platelet aggregating factor (PAF) antagonists and prophylactics of asthma and chronic obstructive pulmonary disease

20 (COPD), antiarrhythmic medicaments, tranquilisers, cardiac glycosides, hormones, antihypertensive medicaments, antidiabetic-, antiparasitic and anticancer medicaments, sedatives and analgesic medicaments, antibiotics, antirheumatic medicaments,

immunotherapies, antifungal and antihypotension medicaments, vaccines, antiviral medicaments, proteins, polypeptides and peptides for exemple peptide hormones and growth  
25 factors, polypeptides vaccines, enxymes, endorphines, lipoproteins and polypeptides involved in the blood coagulation cascade, vitamins and others, for exemple cell surface receptor blockers, antioxidants and free radical scavengers.

Several of these compounds could be administered in the form of pharmacologically

30 acceptable esters, acetals, salts, solvates, such as hydrates, or solvates of such esters or

salts, if any. Both racemic mixtures as well as one or more optical isomers of the above compounds are within the scope of the invention.

Suitable physiologically acceptable salts include acid addition salts derived from inorganic and organic acids, for example the chloride, bromide, sulphate, phosphate, maleate, fumarate, citrate, tartrate, benzoate, 4-methoxybenzoate, 2- or 4-hydroxybenzoate, 4-chlorobenzoate, p-toluenesulphonate, methanesulphonate, ascorbate, acetate, succinate, lactate, glutarate, tricarballoylate, hydroxynaphthalene-carboxylate (xinafoate) or oleate salt or solvates thereof.

Many of the above mentioned classes of pharmacologically active compounds may be administered in combination in a separate, sequential or simultaneous way. When administered together the components can be administered as a single pharmaceutical composition such as a fixed combination. Alternatively the components can be administered separately i.e. one after the other. The time interval for separate administration can be anything from sequential administration to administration several hours apart.

The preferred pharmacologically active glucocorticosteroid agents for use in accordance with the present invention includes mometasone (e.g. as furoate), ciclesonide, zoticasone, flumoxonide, fluticasone (e.g. as 17-propionate) and budesonide, and even more preferred is budesonide. The preferred pharmacologically active long-acting  $\beta_2$ -agonist is salmeterol (e.g. as xinafoate) and formoterol (e.g. as fumarate dihydrate) and even more preferred is formoterol fumarate dihydrate. The preferred anticholinergic agent is tiotropium bromide.

The preferred combinations include fluticasone propionate/salmeterol xinafoate, ciclesonide/formoterol fumarate dihydrate, mometasone furoate/formoterol fumarate dihydrate, budesonide/formoterol fumarate dihydrate, fluticasone propionate/formoterol



fumarate dihydrate and tiotropium bromide/formoterol fumarate dihydrate. The most preferred combination is budesonide/formoterol fumarate dihydrate.

The pharmacologically active ingredients may be administered prophylactically as a preventive treatment or during the course of a medical condition as a treatment of cure.

The composition used in the invention optionally additionally comprises one or more pharmaceutically acceptable additives (e.g. pH or tonicity adjustment), diluents and/or carriers. The composition is preferably in the form of a dry powder for inhalation, wherein the particles of the pharmacologically active ingredients have a mass median diameter of less than 10  $\mu\text{m}$ .

## Examples

Bricanyl Turbuhaler, 0.5 mg/dose, a registered trademark from AstraZeneca is a reservoir type of inhaler, where the main assembly was treated in different ways. The metered dose was measured at 60 l/min.

The invention will be illustrated but not limited to the following examples:

### Experiment 1

<i>Treatment</i>	<i>Dose (mg)</i>	<i>Standard deviation (mg)</i>
Untreated	0.384	0.107
Drying agent/low pressure (40 torr)	0.545	0.069

**Experiment 2**

Untreated	0.439	0.088
Drying agent	0.420	0.083

**Experiment 3**

Untreated	0.451	0.099
Low pressure (40 torr)	0.511	0.079

**Experiment 4**

Mean values of metered dose(mg) and standard deviations (mg) for 46 analyses of Bricanyl® Turbuhaler® 0.5 mg

Untreated	0.467	0.042
Low pressure	0.534	0.029

It can be seen that the dose from treated inhalers under reduced pressure will retain the nominal dose of the inhaler and the relative standard deviation will decrease improving the inhaler performance. There is also improvement when e.g. the mouth piece is treated as well. The results further indicate that the process is valid for all kind of compounds/powder formulations and thereby having a more general applicability. The improvement is lasting for a long period of time.

Any complete inhaler including the formulation or just the formulation or parts of the inhaler may also be treated in the same way.

## CLAIMS

1. A process for the preparation of a dry powder inhaler which comprises exposing a dry powder inhaler optionally filed with a powder formulation, or one or more components thereof to a gas at low pressure.
2. A process according to claim 1 where the gas is air.
3. A process according to claim 1 or 2 where the pressure is less than 200mbar.
4. A process according to any one of claims 1 to 3 where the pressure is less than 100mbar.
5. A process according to any one of claims 1 to 4 where the inhaler is a Turbuhaler.
6. A process according to any one of claims 1 to 5 where the powder formulation comprises one or more drugs and one or more pharmaceutically acceptable carriers or excipients.
7. A process according to any one of claims 1 to 5 where the drug is mometasone (e.g. as furoate), ciclesonide, zoticasone, flumoxonide, fluticasone (e.g. as 17-propionate) budesonide, salmeterol (e.g. as xinafoate) and formoterol (e.g. as fumarate dihydrate) or tiotropium bromide.
8. A process according to any one of claims 1 to 5 where the drugs are combinations of fluticasone propionate/salmeterol xinafoate, ciclesonide/formoterol fumarate dihydrate, mometasone furoate/formoterol fumarate dihydrate, budesonide/formoterol fumarate dihydrate, fluticasone propionate/formoterol fumarate dihydrate and tiotropium bromide/formoterol fumarate dihydrate.

9. A process for reducing electrostatic charges from one or more inhaler components, or a complete inhaler, optionally filed with a powder formulation, the process comprising:

i) placing one or more inhaler components, or a complete inhaler, optionally filed with a powder formulation in a chamber,

5 ii) reducing the pressure of gas in the chamber,

iii) returning the pressure to atmospheric pressure

iv) optionally repeating steps ii) and iii)

10. A dry powder inhaler prepared according to the process of any one of claims 1 to 9.

101245

**ABSTRACT**

The invention relates to a processing method and apparatus, more particularly, to processing a body so as to remove any electrostatic charge and improve inhaler  
s performance in drug delivery to the respiratory tract.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20

1.

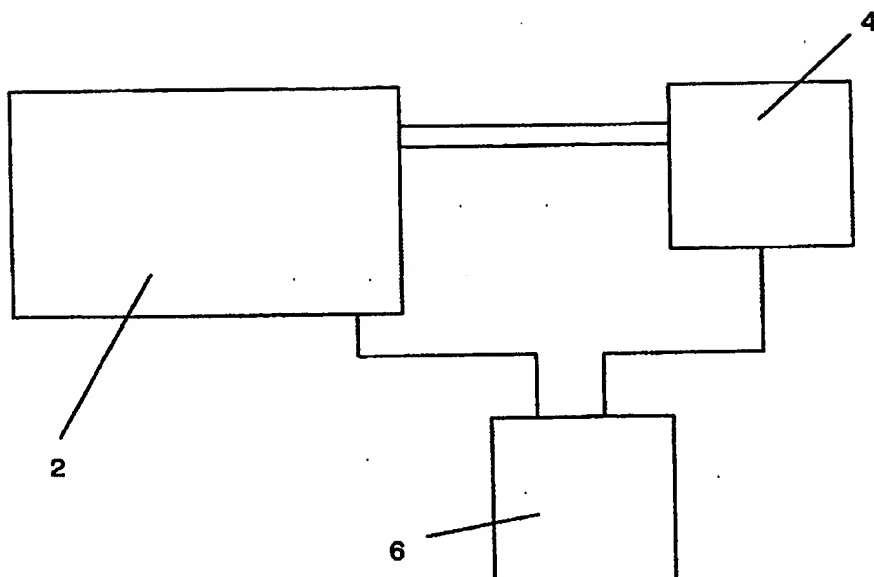


Figure 1. Schematic drawing of the apparatus embodying the present invention. 2 = Chamber; 4 = Pump; 6 = Device for measuring and controlling the pressure

2.

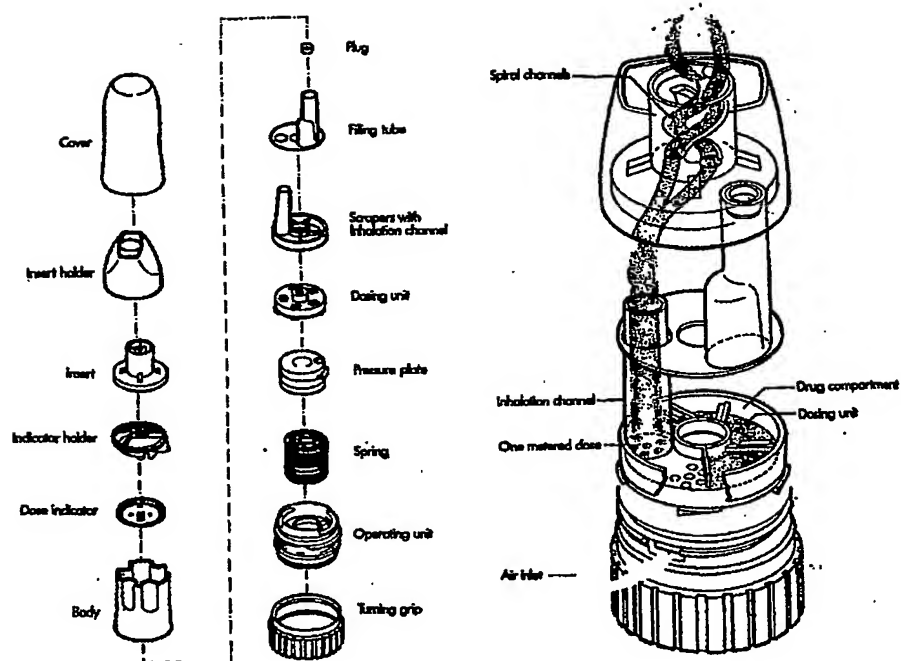


Figure 2. Turbuhaler® and its parts

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**